


## N732CP, CC2674R10 Dongle

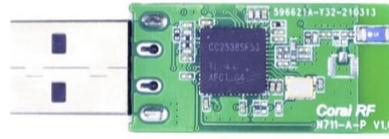

### **N732CP Dongle Introduce**

N732CP CC2674R10 ZigBee/BLE 5.3 dongle designed for 2400Mhz band. Up to +5 dBm output power and down to -100 dBm sensitivity at 250 kbps.

N732CP is a small ZigBee/BLE dongle for ZigBee network or BLE network.. All of the N732CP 's electronics (Including an antenna) reside on a single PCB.

The CC2674R10 dongle based TI wireless MCU CC2674R10 and UART to USB chip. The dongle available frequency is from 2400M --2500Mhz. The hardware is designed for maximum range, 100m + Range (Line of Sight, 125 kbps).

N732CP dongle integrated TI CC2674R10, TCXO, pcb antenna, LED, key, and UART TO USB chip. N732CP dongle supports Multiple protocols, eg: ZigBee and BLE 5.3. AT command supports.

N732CP is suitable for ISM band in China, EU and USA.

CC2674R10 integrated :

- Powerful 48MHz Arm® Cortex®-M33 processor with TrustZone®
- FPU and DSP extension
- 1024kB flash program memory
- 8kB of cache SRAM
- 256kB of ultra-low leakage SRAM with parity for high-reliability operation
  - 32kB of additional SRAM if parity is disabled
- Dynamic multiprotocol manager (DMM) driver
- Programmable radio includes support for 2- (G)FSK, 4-(G)FSK, MSK, Bluetooth® 5.3 Low Energy, IEEE 802.15.4 PHY, and MAC
- Supports over-the-air update (OTA)

## N732CP Dongle Parameter

Model	N732CP
dongle Interface	USB 2.0
Frequency	2400M --2500Mhz
RF Data Rate	1.2-4000 kbps
Transmitting Power	+5 dBm
Receiving Sensitivity	-100 dBm at 250 kbps
TX Current	160 mA
RX Current	16 mA
Frequency Deviation	+/- 1 khz
Communication Distance	10 – 500 m(Visual distance)
Antenna Interface	IPEX, PCB antenna
Installation Mode	USB PLUG
Volume (mm)	37 mm x 17 mm x 7 mm
Operating Voltage	+ 5 V
Working Temperature and Humidity Environment	Temperature: -40 - 80 °C; Humidity 10-95 %RH
Storage Temperature and Humidity Environment	Temperature: -40 - 80 °C; Humidity 10-95 %RH
Weight (kg)	≈10g

## Application Area

multiprotocol 2.4GHz wireless microcontroller (MCU) supporting

Thread;

Zigbee®;

Bluetooth® 5.2 low energy;

IEEE 802.15.4;

IPv6-enabled smart objects (6LoWPAN)

## Ordering Information

N732CP -CC2674R10 -2400M      RF dongle      CC2674R10      5mW – 2400-2500Mhz

More information please contact with us.