

N532CS , CC1312R7 Module



N532CS Module Introduce

N532CS CC1312R7 transceiver module based TI wireless MCU **CC1312R7** and **PA** chip, designed for 868M and 915MHz band. Up to **+24 dBm** output power and down to -110 dBm sensitivity at **50kbps**.

N532CS is a low-cost and small size sub g transceiver module for transmitting and receiving digital data via radio frequency. All of the N532CS 's electronics (don't including an antenna) reside on a single PCB, and all operational power is derived from a single supply voltage.

The N532CS module design consists of a CC1314R10 low-power, integrated sub 1G transceiver RF chip ,all IO pin of CC1312R74T0RGZ are brought out. The module available frequency is from 820 to 960Mhz. The hardware is designed for maximum range, 5000m + Range (Line of Sight).

N532CS module based TI CC1312R74T0RGZ wireless MCU transceiver. The module use SMD package. It has small size, the module is suitable for SMT production. Rapid development without understanding RF. The module supports WMBus and so on.

N532CS is suitable for ISM band in China, EU and USA at 433/ 868/ 915Mhz.

N532CS Module Parameter

Model	N532CS
Module Interface	SPI, UART
Frequency	160-960 Mhz, 1200Mhz
RF Data Rate	0-4000 kbps
Transmitting Power	+24 dBm
Receiving Sensitivity	-112 dBm at 50 kbps
TX Current	200 mA (type)

RX Current	7 mA
Frequency Deviation	+/- 10 khz, with Crystal oscillator
Communication Distance	10 – 5 000 m (Visual distance)
Antenna Interface	RF pin, IPEX
Installation Mode	SMD
Volume (mm)	31 mm x 22 mm x 3 mm
Operating Voltage	2 - 3.6 V
PA Operating Voltage	3 - 6 V, 5V type
Working Temperature and Humidity Environment	Temperature: -30-70 °C; Humidity 10-95 %RH
Storage Temperature and Humidity Environment	Temperature: -40-80 °C; Humidity 10-95 %RH
Weight (kg)	≈10g

N532CS Module Pinout

Pin Number	Function	Describe
1	GND	
2	GND	
3	DIO1	
4	DIO2	MCU IO port
5	DIO3	MCU IO port
6	DIO4	MCU IO port
7	DIO5	MCU IO port
8	DIO6	MCU IO port
9	DIO7	MCU IO port
10	DIO8	MCU IO port
11	DIO9	MCU IO port
12	DIO10	MCU IO port
13	VCCPA	PA power supply, 3V -- 6V, MAX current: 200mA
14	VCC	CC1314R10 power supply, 2V -- 3.6V
15	GND	GND
16	DIO11	TMS

17	DIO12	TCK
18	DIO13	MCU IO port
19	DIO14	MCU IO port
20	DIO15	MCU IO port
21	TMS	MCU IO port
22	TCK	MCU IO port
23	RESET	MCU IO port
24	DIO16	MCU IO port
25	DIO17	MCU IO port
26	DIO18	MCU IO port
27	DIO19	MCU IO port
28	DIO20	MCU IO port
29	DIO21	MCU IO port
30	DIO22	MCU IO port
31	DIO23	MCU IO port
32	DIO24	MCU IO port
33	DIO25	MCU IO port
34	RF	
35	GND	

Application Area

Ultra low-power wireless applications

Operating in the 315/433/868/915 MHz ISM/SRD bands

Wireless alarm and security systems

Industrial monitoring and control

Wireless sensor networks

AMR – Automatic Meter Reading


Home and building automation

Wireless MBUS

N532CS PALNA Logic

	DIO27	DIO28	DIO29
TX	1	0	1
RX	0	1	0
Sleep	0	0	0

N532CS Layout

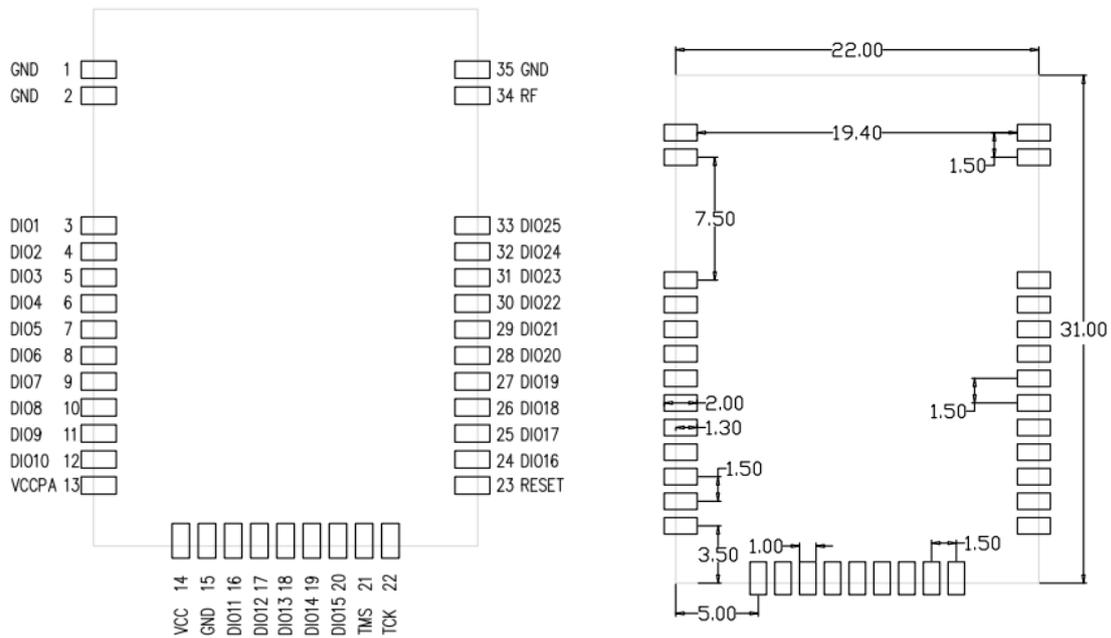

Ordering Information

N532CS-CC1312R7-433M	RF Module	CC1312R74T0RGZ	24DBM	200mW – 410-480Mhz
N532CS-CC1312R7-868M	RF Module	CC1312R74T0RGZ	24DBM	200mW – 860-880Mhz
N532CS-CC1312R7-915M	RF Module	CC1312R74T0RGZ	24DBM	200mW – 910-930Mhz
N532CS-CC1312R7-1200M	RF Module	CC1312R74T0RGZ	24DBM	200mW – 1210-1250Mhz

More information please contact with us.