

N202

CC2500 with PA 2.4G ISM FSK RF Module



INTRODUCTION

N201 is a low-cost and small size module for transmitting and receiving digital data via radio frequency. All of the N201's electronics (including an antenna) reside on a single PCB, and all operational power is derived from a single supply voltage.

The transceiver design consists of TI CC2500 and CC2592, it is a low-power, integrated UHF transceiver RF module. The module used PCB antenna. The module available frequency is from 2400MHz to 2483MHz. The hardware is designed for maximum range and optimal battery life.

N202 can be used with N208 to transmit N202's data to PC.

Technical specifications

Hardware Information

Interfaces: UART (x1), I2C (x1), SPI (x1)
A/D & D/A converters
PWM timers
Dimension: 30 x 20 x 7 mm
Operating voltage: 2-3.6V
Operating temperature: -40°C to +85°C

Consumption (Sleep): 1uA
Consumption (RX): 17mA
Consumption (TX): 160mA (18dBm)
Wireless Micro-controller: CC2500
Mounting: PLUS

Software

Asynchronous Transparent mode
Low Power mode
Secure mode


RSSI mode
Serial bootloader
Adjustable packet size

Wireless Interface

RF pin
Frequency: 2400 to 2483MHz
Modulation: 4GFSK, 2GFSK, 2FSK
RF deviation: ± 10 KHz

RF data rate: from 2.4 to 500 kbps
RF output power: up to 18dBm
RF sensitivity: -102dBm

Pin configuration & Dimensions

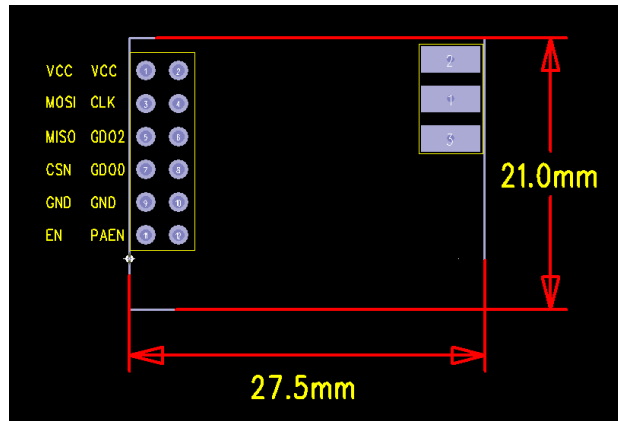

Pin Define

PCB Layout (mm)

Part numbers

N202-A-P-2.4G RF Module N202-A-S – 60mW – 2400Mhz

OTHER MODULES OF BANDS RANGE

N201-A-P-2.4G RF Module N201-A-P – 1mW – 2400Mhz

Manufacturer

SHENZHEN NANCHENG TECHNOLOGY CO.,LTD

Notice

This module have not any fireware,custom must use your own firmware.

More about CC2500 information please see the CC2500 datasheet.

Contact with us

Shenzhen NanCheng Technology CO.,LTD

Addr: Room307,Xinbaoyuan Building,N5179,District 74 Xinan Street,

BaoAn District,Shenzhen,China 518101

Sales department: +0086 755 29662101

E-mail : info@hkulike.com

Web: www.hkulike.com