


N211

ADF7242 PA 2.4G,Real time transmission,ISM FSK RF Module

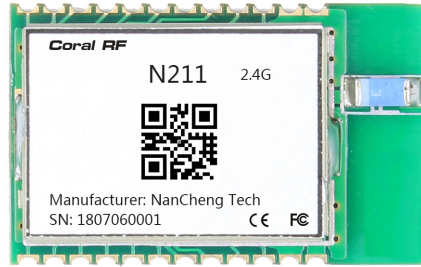

INTRODUCTION

N211 is a low-cost and small size module for Real time transmission. All of the N211's electronics (including an antenna) reside on a single PCB, and all operational power is derived from a single supply voltage.

The transceiver design consists of a ADI ADF7242 low-power, integrated UHF transceiver RF chip, The module used 1PCS antenna. The module available frequency is from 2400Mhz to 2483mhz, The hardware is designed for maximum range and optimal battery life.

Technical specifications

Hardware Information

Interfaces: UART (x1), I2C (x1), SPI (x1)
A/D & D/A converters
PWM timers
Dimension: 37 x 22 x 3 mm
Operating voltage: 3.3V
Operating temperature: -40°C to +85°C

Consumption (Sleep): 1uA
Consumption (RX): 17mA
Consumption (TX): 240mA (24dBm)
Wireless Micro-controller: ADF7242
Mounting: SMD

Software

Asynchronous Transparent mode
Low Power mode
Secure mode


RSSI mode
Serial bootloader
Adjustable packet size

Wireless Interface


RF pin
Frequency: 2400 to 2483MHz
Modulation: 4GFSK, 2GFSK, 2FSK
RF deviation: ± 10 Khz

RF data rate: from 50 to 2000 kbps
RF output power: up to 24dBm
RF sensitivity: -96dBm

Pin configuration & Dimensions

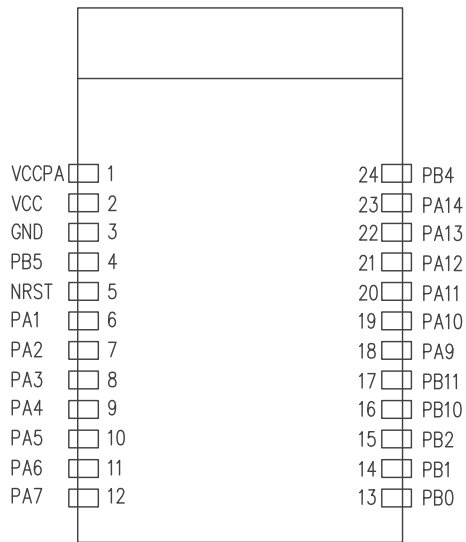

Pin Define

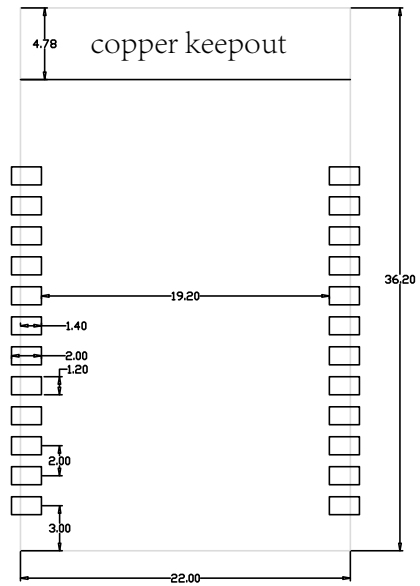

PCB Layout (mm)

Part numbers

N211-A-S-2.4G RF Module N211-A-S – 100mW – 2400Mhz

OTHER MODULES OF BANDS RANGE

N210-A-S-2.4G RF Module N211-A-S – 2mW – 2400Mhz

Manufacturer

SHENZHEN NANCHENG TECHNOLOGY CO.,LTD

Contact with us

Shenzhen NanCheng Technology CO.,LTD

Addr: Room307,Xinbaoyuan Building,N5179,District 74 Xinan Street,

BaoAn District,Shenzhen,China 518101

Sales department: +0086 755 29662101

E-mail : info@hkulike.com

Web: www.hkulike.com