


## N534EP, CC1314R106T0RGZ Dongle

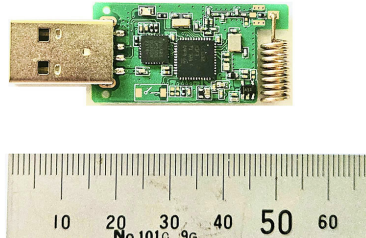

### N534EP dongle Introduce

N534EP CC1314R10 transceiver dongle designed for 169M,433M, 868M, 915MHz and 1200Mhz band. Up to +14 dBm output power and down to -110 dBm sensitivity at 50 kbps.

N534EP is a low-cost and small size FSK RF transceiver dongle for transmitting and receiving digital data via radio frequency. All of the N534EP's electronics (don't including an antenna) reside on a single PCB.

The transceiver dongle based TI wireless MCU CC1314R106T0RGZ, CC1314R106T0RGZ integrated sub 1G transceiver RF chip. The dongle available frequency is from 169M,433M, 868M, 915MHz and 1200Mhz. The hardware is designed for maximum range, 500m + Range (Line of Sight, 50 kbps).

N534EP dongle integrated TI CC1314R106T0RGZ, TCXO, spring antenna, LED, key, and UART TO USB chip.

N534EP dongle supports Multiple protocols, eg: Wi-Sun and WMBus. AT command supports.

N534EP is suitable for ISM band in China, EU and USA.

### N534EP Dongle Parameter

Model	N534EP
dongle Interface	USB 2.0
Frequency	169M,433M, 868M, 915MHz and 1200Mhz
RF Data Rate	1.2-4000 kbps
Transmitting Power	+14 dBm
Receiving Sensitivity	-110 dBm at 50 kbps

TX Current	35 mA
RX Current	21 mA
Frequency Deviation	+/- 1 khz
Communication Distance	10 – 1500 m(Visual distance)
Antenna Interface	IPEX, spring antenna
Installation Mode	USB PLUG
Volume (mm)	37 mm x 20 mm x 7 mm
Operating Voltage	+ 5 V
Working Temperature and Humidity Environment	Temperature: -40 - 80 °C; Humidity 10-95 %RH
Storage Temperature and Humidity Environment	Temperature: -40 - 80 °C; Humidity 10-95 %RH
Weight (kg)	≈10g

### Application Area

Ultra low-power wireless applications

Operating in the 315/433/868/915 MHz ISM/SRD bands

Wireless alarm and security systems

Industrial monitoring and control

Wireless sensor networks

AMR – Automatic Meter Reading

Home and building automation

Wireless MBUS

Arduino

### Ordering Information

N534EP-CC1314R106T0RGZ-868M      RF dongle      CC1314R106T0RGZ      20mW – 860-960Mhz

N534EP-CC1314R106T0RGZ-1200M      RF dongle      CC1314R106T0RGZ      20mW – 1200-1250Mhz

More information please contact with us.